

# Specifications

## Trimmer


Double Insulation

Electronic Speed Control  
(3707FC, 3708FC)


Built-in Job Light  
(3707FC, 3708FC)

### Dimension

3707 series

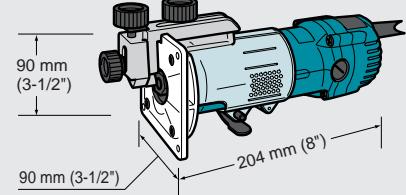

3708 series

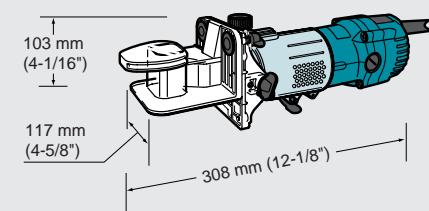

	3707	3707F	3707FC	3708	3708F	3708FC
Base Type		Transparent base			For chamfering tilt base	
Collet capacity				6 mm or 6.35 mm (1/4")		
Continuous rating Input	440 W		500 W		440 W	500 W
No load speed		35,000 min <sup>-1</sup>		26,000 min <sup>-1</sup>		35,000 min <sup>-1</sup>
Overall height		204 mm (8")			308 mm (12-1/8")	
Net weight		1.2 kg (2.6 lbs)			1.3 kg (2.9 lbs)	
Power supply cord			2.5 m (8.2 ft)			

## Standard equipment

### Trimmer




	Part No.
Straight bit (Carbide-tipped)	6 mm 793076-1
	1/4" 793074-5
Collet cone	6 mm 763607-0
	1/4" 763608-8

	Part No.
Straight guide assembly (Straight guide)	122391-0
Trimmer guide assembly	122389-7
Templet guide	343577-5

Items of standard equipment may differ from country to country.

## Optional accessories

### Trimmer

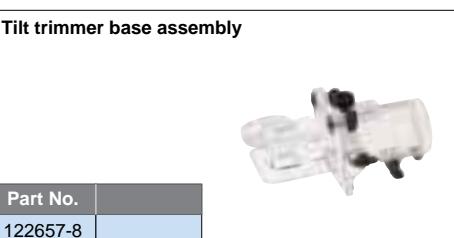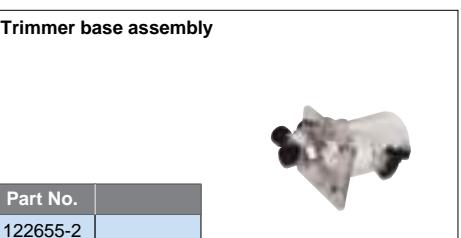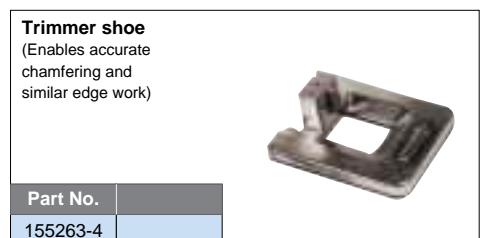

Router bit set (mm) Shank size : 6mm(12 pcs./set)	Part No.
D : 12.7 R : 6.35 B : 8.8 L : 29.0	12.7 20.0 25.0
D : 16.0 R : 9.5 B : 17.0 L : 25.5	16.0 9.5 17.0 25.5
D : 6.0 R : 20.0 B : 25.0 L : 29.0	6.0 20.0 25.0 29.0
D : 28.6 R : 17.0 B : 25.5 L : 29.0	28.6 17.0 25.5 29.0
D : 12.7 R : 4.0 B : 16.0 L : 26.5	12.7 4.0 16.0 26.5
D : 25.0 R : 6.3 B : 13.5 L : 25.0	25.0 6.3 13.5 25.0
D : 22.2 R : 6.3 B : 12.7 L : 26.5	22.2 6.3 12.7 26.5
D : 22.0 R : 6.3 B : 12.7 L : 26.5	22.0 6.3 12.7 26.5
D : 12.7 R : 12.7 B : 12.2 L : 29.0	12.7 12.7 12.2 29.0
D : 32.0 R : 14° B : 14° L : 30.0	32.0 14° 14° 30.0
D : 12.7 R : 45° B : 13.0 L : 28.0	12.7 45° 13.0 28.0
D : 12.0 R : 20.0 B : 20.0 L : 28.0	12.0 20.0 20.0 28.0

Part No.  
A-87921

A world's leading manufacturer of power tools

**Makita**®

Double Insulation

Built-in Job Light  
(3707F/FC, 3708F/FC)

# Trimmer

**3707/3707F/3707FC  
3708/3708F/3708FC**

**Ergonomically enhanced slim body  
for superior handling and reduced  
operator fatigue!**



Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan

PRINTED IN JAPAN Z 14315-2 2002-3

**NEW**



PHOTO: Model 3707F

## LED Light Unit

1. Long life time : more than 10,000 H
2. Excellent dirt-proof and vibration-proof construction
3. Compact size and Lightweight
4. Maintenance Free



Model	Built-in Job Light	Electronic Speed Control	Base Type
3707	No	No	Transparent base
3707F	Yes	No	Transparent base
3707FC	Yes	Yes	Transparent base
3708	No	No	For chamfering tilt base
3708F	Yes	No	For chamfering tilt base
3708FC	Yes	Yes	For chamfering tilt base

## Trimmer 3707/3707F/3707FC 3708/3708F/3708FC



Photo: Model 3707



Photo: Model 3708


### Built-in Job Light (3707F/FC, 3708F/FC)



Photo: Model 3707F

Excellent job efficiency in dimly-lit place.

### Switch (3707F/FC, 3708F/FC)

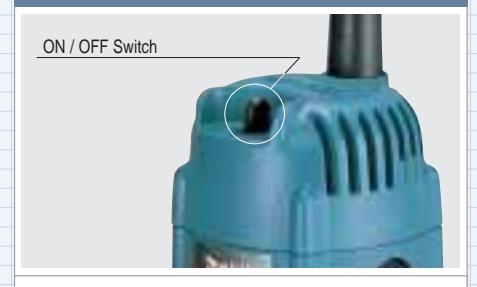

ON / OFF switch for both light and Motor.

### Depth Adjustment



Photo: Model 3707F

Rubber roller for easy and precise depth adjustment.

### Simple Locking System




Photo: Model 3707F

### Round Base (3707/ F/FC)



Just remove 4 screws from Base, Base can be switched to round type Base.

### Square base (3707/F/FC)

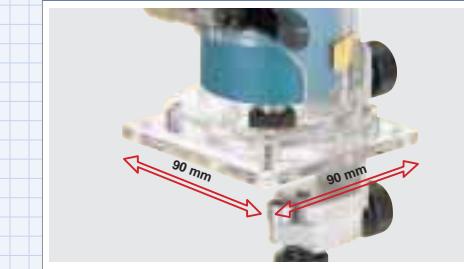

Square base make same distance from center of bit.

### Slim and long size body



Ergonomically enhanced slim and long size body for superior handling.